




VARDAflex Eco Standard Reach30 M-R. Flex.LEDStrip, 24V, Innen, 4000K

Article nr.: 82318

mit selbstklebender Rückseite, · für die Innenanwendung · · alle 10 cm / 6 LEDs teilbar · Anzahl der LEDs: 1800 · LED Abstand: 16,67 mm · Ausstrahlwinkel: 120° · CRI: >90 · IC Baustein on board (konstante Bestromung) · Lichtstrom pro Meter: 247 lm · Betriebsspannung: 24V DC · Leistung pro Meter: 3 W · Lebensdauer L70B50: >= 36.000 h · Energieeffizienzklasse: G · LxBxH in mm: 30.000 x 10 x 1,5 · · Leichte lötfreie Montage durch Steckverbindungen (optional). · Maximale Länge pro Anschluss: 30 Meter. Für größere Längen neu einspeisen. · Lieferumfang: 30 Meter-Rolle · · SECONDLIFE ARTIKEL -stark rabattiert- Nur solange der Vorrat reicht! · <https://rutech.de/secondlife>

TECHNICAL DATA

Unit Code	Stück
BAR code	4012094823188
Housing colour	Weiss
Length	30000.00 mm
Width	10.00 mm
Height	1.50 mm
LED colour	ca. 4000K neutralweiß
Lightoutput per fixture	7410.00 lm
Lightoutput per LED	4.11 lm
Lamp	Inklusive LED

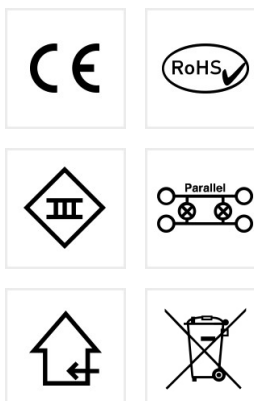



VARDAflex Eco Standard Reach30 M-R.
Flex.LEDStrip, 24V, Innen, 4000K
Article nr.: 82318

TECHNICAL DATA

IP rating	20
Power	90 W
Current mA	3750 mA
Voltage	24 V
Amount of LED	1800
Temperature range	-20 - 45
LED per meter	60
Dimension of segments	100.00 mm
Energy efficiency class	EEK-Label_G
CRI	≥ 90
Lifetime L70B50	36.000 h





VARDAflex Eco Standard Reach30 M-R.
Flex.LEDStrip, 24V, Innen, 4000K
Article nr.: 82318

TECHNICAL DRAWING

