


Oh! Smash_P E27



Pendelleuchte | 220-240 V | 1xE27
12216



Technische Daten	
Typ	Oberfläche
Installationsposition	Decke
Installationsumgebung	Indoor
Anschluss der Leuchte	1 x E27 Max 46W
Light emission direction	downward
Frequency	50-60 Hz
Isolierklasse	1
IP	IP20
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
Leuchte dimmbar	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	2.5 m
Harzbeschichtung	Nein
Nettogewicht	3.060 Kg

Oberfläche Gehäuse	
Material	PC
Farbe	Weiß
Oberfläche Diffusor	
Material	PE
Farbe	neutral
Oberfläche Fassung	
Material	Eisen
Farbe	Weiß RAL 9010
Bearbeitungstyp	Lackierung

Pendelleuchte | 220-240 V | 1xE27
12216

Double emission pendant luminaires for indoor application. Compatibility:
LED lamp, halogen 46 W, compact fluo 20 W; lamp cap 1xE27.

The device body is made of PC and features a white finish; the diffuser is made of pe; the mounting frame is made of iron, with a white ral 9010 finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 3.060 kg.

. The power supply cable is included and features a 2.5 m length.


The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	88 %
Lichtstrom (Lichtquelle)	700 lm
Leuchten Lichtstrom	622 lm
Consumption	46 W
Leuchten Lichtausbeute	15 lm/W
Farbwiedergabeindex	100 Ra
Verbindungstemperatur (Leuchte)	80
Standardumgebungstemperatur	25°C

UGR	
UGR axial	10.6
UGR transversal	10.6
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL	
Optik C0/C180	176°
Light distribution simmetry	Symmetrical

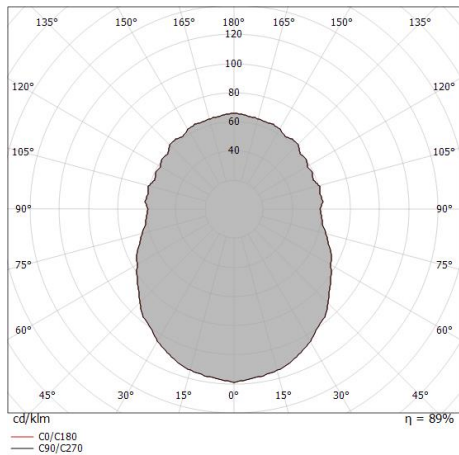

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	28.64	E(0°) E(C0) 88.0° 3330
1.0	57.27	E(0°) E(C0) 88.0° 830
1.5	85.91	E(0°) E(C0) 88.0° 370
2.0	114.55	E(0°) E(C0) 88.0° 210
2.5	143.18	E(0°) E(C0) 88.0° 130
3.0	171.82	E(0°) E(C0) 88.0° 90

— C0/C180 (Half-peak divergence: 176.0°)