


Wandleuchten - Systeme | 1 topLED 25 W DC 500 mA

CRI 80

9172



| Technische Daten                                    |                      |
|-----------------------------------------------------|----------------------|
| Designer                                            | Linea Light          |
| Jahr der Verwirklichung                             | 2020                 |
| Typ                                                 | - - -                |
| Installationsposition                               | Wand - Decke         |
| Installationsumgebung                               | Outdoor              |
| Lichtquelle                                         | LED                  |
| Optik                                               | General Lighting     |
| Light emission direction                            | downward             |
| Lampenleistung                                      | 25 W                 |
| Ähnlichste Farbtemperatur / Tone                    | 2700 - 3000 - 4000 K |
| Lichtstrom (Lichtquelle)                            | 2500 lm              |
| Ähnlichste Farbtemperatur / Tone                    | 3000 K               |
| Farbwiedergabeindex                                 | 80 Ra                |
| Gleichstrom/Gleichspannung                          | AC                   |
| Isolierklasse                                       | 2                    |
| IP                                                  | IP54                 |
| IK                                                  | IK10                 |
| Glühdrahtprüfung                                    | 650°                 |
| Direkte Montage auf normal entflammaren Oberflächen | Ja                   |
| CE                                                  | Ja                   |
| Einschließlich Driver                               | Driver               |
| Leuchte dimmbar                                     | Nein                 |
| Schwenkbarkeit                                      | Nein                 |
| Drehbarkeit                                         | Nein                 |
| Begehbarkeit                                        | Nein                 |
| Überrollbarkeit                                     | Nein                 |
| Einschließlich Kabel                                | Nein                 |
| Harzbeschichtung                                    | Nein                 |
| Typ Lichtabstrahlung                                | Einflammig           |
| Nettogewicht                                        | 1.360 Kg             |
| Schutz vor elektrostatischen Entladungen            | Nein                 |
| Schutz vor Stoßspannungen                           | Nein                 |

| Oberfläche Gehäuse |      |
|--------------------|------|
| Material           | PMMA |
| Farbe              | Weiß |

| Oberfläche Diffusor |      |
|---------------------|------|
| Material            | PMMA |
| Farbe               | Opal |



Wandleuchten - Systeme | 1 topLED 25 W DC 500 mA | CRI 80 | Farbtemperatur: 2700 K  
9172

Single emission wall lights or systems for outdoor application. The warm white LED light source with a general lighting light distribution is composed of 1 toplid LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 2500 lm, with a 100.0 lm/W nominal luminous efficacy.

The device body is made of pmma and features a white finish; the diffuser is made of pmma. The ingress protection degree is IP54; the total weight is of 1.360 kg.

The total absorbed power is W.

The device features protection class II and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Energieeffizienzklasse

ieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse C.

Illuminotechnical Eigenschaften


|                                       |                |
|---------------------------------------|----------------|
| Light Output Ratio (LOR)              | 89 %           |
| Lichtstrom (Lichtquelle)              | 2500 lm        |
| Leuchten Lichtstrom                   | 2247 lm        |
| Consumption                           | 25 W           |
| Leuchten Lichtausbeute                | 89 lm/W        |
| Farbtemperatur                        | 2700 K         |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Farbwiedergabeindex                   | 80 Ra          |
| Verbindungstemperatur (Leuchte)       | 80             |
| Standardumgebungstemperatur           | 25             |

LED Life / Failure Ratio

L70 B20 C0 72500h

OPTICAL

|                             |             |
|-----------------------------|-------------|
| Light distribution simmetry | Symmetrical |
| Optik C0/C180               | 112°        |

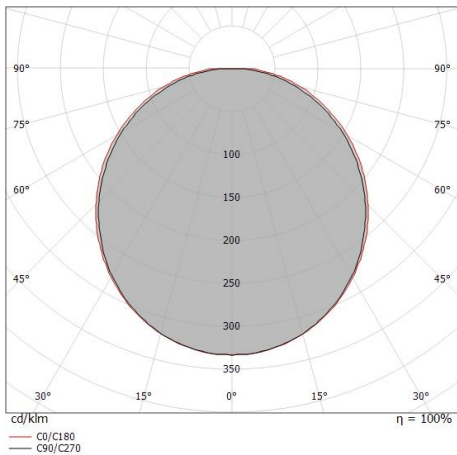

Wandleuchten - Systeme | 1 topLED 25 W DC 500 mA | CRI 80 | Farbtemperatur: 3000 K

9172

Single emission wall lights or systems for outdoor application. The warm white LED light source with a general lighting light distribution is composed of 1 toplid LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 2500 lm, with a 100.0 lm/W nominal luminous efficacy.

The device body is made of pmma and features a white finish; the diffuser is made of pmma. The ingress protection degree is IP54; the total weight is of 1.360 kg.

The total absorbed power is W.

The device features protection class II and can be wall lights or ceiling-mounted.


Compliant with the EN 60598-1 standard and its specific provisions.

| Energieeffizienzklasse                                               |  |
|----------------------------------------------------------------------|--|
| ieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse C. |  |

| Illuminotechnical Eigenschaften       |                |
|---------------------------------------|----------------|
| Light Output Ratio (LOR)              | 92 %           |
| Lichtstrom (Lichtquelle)              | 2500 lm        |
| Leuchten Lichtstrom                   | 2317 lm        |
| Consumption                           | 25 W           |
| Leuchten Lichtausbeute                | 92 lm/W        |
| Farbtemperatur                        | 3000 K         |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Farbwiedergabeindex                   | 80 Ra          |
| Verbindungstemperatur (Leuchte)       | 80             |
| Standardumgebungstemperatur           | 25             |

| LED Life / Failure Ratio |  |
|--------------------------|--|
| L70 B20 C0 72500h        |  |

| OPTICAL                     |             |
|-----------------------------|-------------|
| Light distribution simmetry | Symmetrical |
| Optik C0/C180               | 112°        |

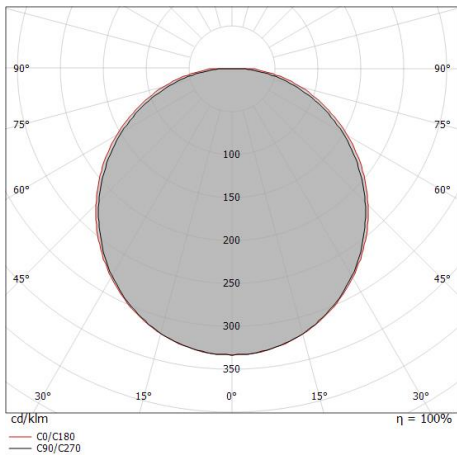

Wandleuchten - Systeme | 1 topLED 25 W DC 500 mA | CRI 80 | Farbtemperatur: 4000 K

9172

Single emission wall lights or systems for outdoor application. The warm white LED light source with a general lighting light distribution is composed of 1 toplid LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 2500 lm, with a 100.0 lm/W nominal luminous efficacy.

The device body is made of pmma and features a white finish; the diffuser is made of pmma. The ingress protection degree is IP54; the total weight is of 1.360 kg.

The total absorbed power is W.

The device features protection class II and can be wall lights or ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

| Energieeffizienzklasse                                               |
|----------------------------------------------------------------------|
| ieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse C. |

| Illuminotechnical Eigenschaften       |                |
|---------------------------------------|----------------|
| Light Output Ratio (LOR)              | 95 %           |
| Lichtstrom (Lichtquelle)              | 2500 lm        |
| Leuchten Lichtstrom                   | 2389 lm        |
| Consumption                           | 25 W           |
| Leuchten Lichtausbeute                | 95 lm/W        |
| Farbtemperatur                        | 4000 K         |
| Standard Deviation of Colour Matching | 3 Step MacAdam |
| Farbwiedergabeindex                   | 80 Ra          |
| Verbindungstemperatur (Leuchte)       | 80             |
| Standardumgebungstemperatur           | 25             |

| LED Life / Failure Ratio |
|--------------------------|
| L70 B20 C0 72500h        |

| OPTICAL                     |             |
|-----------------------------|-------------|
| Light distribution simmetry | Symmetrical |
| Optik C0/C180               | 112°        |

