



## Helion

Bollard IP66 Helion LED 10.7 SW 2700-3200-4000K ON-OFF Urban grey 701lm

### Technical features

Luminaire total power: 10.7W  
Real lumens: 701 (3200K)  
Real lm/W: 66  
Correlated Colour Temperature (CCT): SW 2700-3200-4000K  
Structure material: Aluminium  
Structure finish: Urban grey  
Diffuser material: Polycarbonate  
Diffuser finish: OPAL  
Voltage / frequency: 100-240V/50-60Hz  
Dimming protocol: ON-OFF  
Power Factor: 0.95  
THD%: 7.5  
Useful life: 50,000h L80B20  
Max. temperature: 50°C  
Warranty: 5 años  
Resistant to marine environments: Yes



### Luminotechnic features

CRI: 80  
MacAdam steps: 3  
Photobiological risk: RG1

Lampholder	Quantity	Light source power (W)
LED	1	9.1W

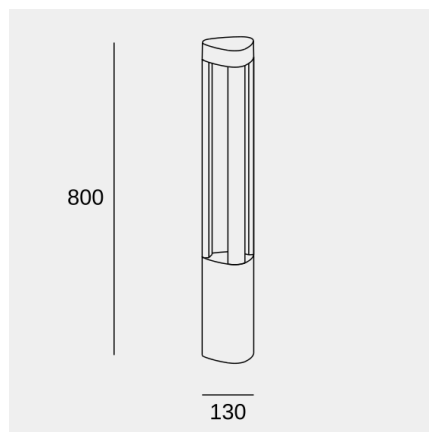


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.



## Helion

Bollard IP66 Helion LED 10.7 SW 2700-3200-4000K ON-OFF Urban grey 701lm

### Logistics



x 4

Net weight (kg): 2.03

Packaged weight (kg): 2.48

Packaging: 140mm x 140mm x 815mm

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.



## Helion

Bollard IP66 Helion LED 10.7 SW 2700-3200-4000K ON-OFF Urban grey 701lm

### Optional accessories



71-E012-48-48

Floor mounting bolts

Structure material: Steel  
Dimensions: NA x NA x NA  
Net weight (kg): 0.23

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.