

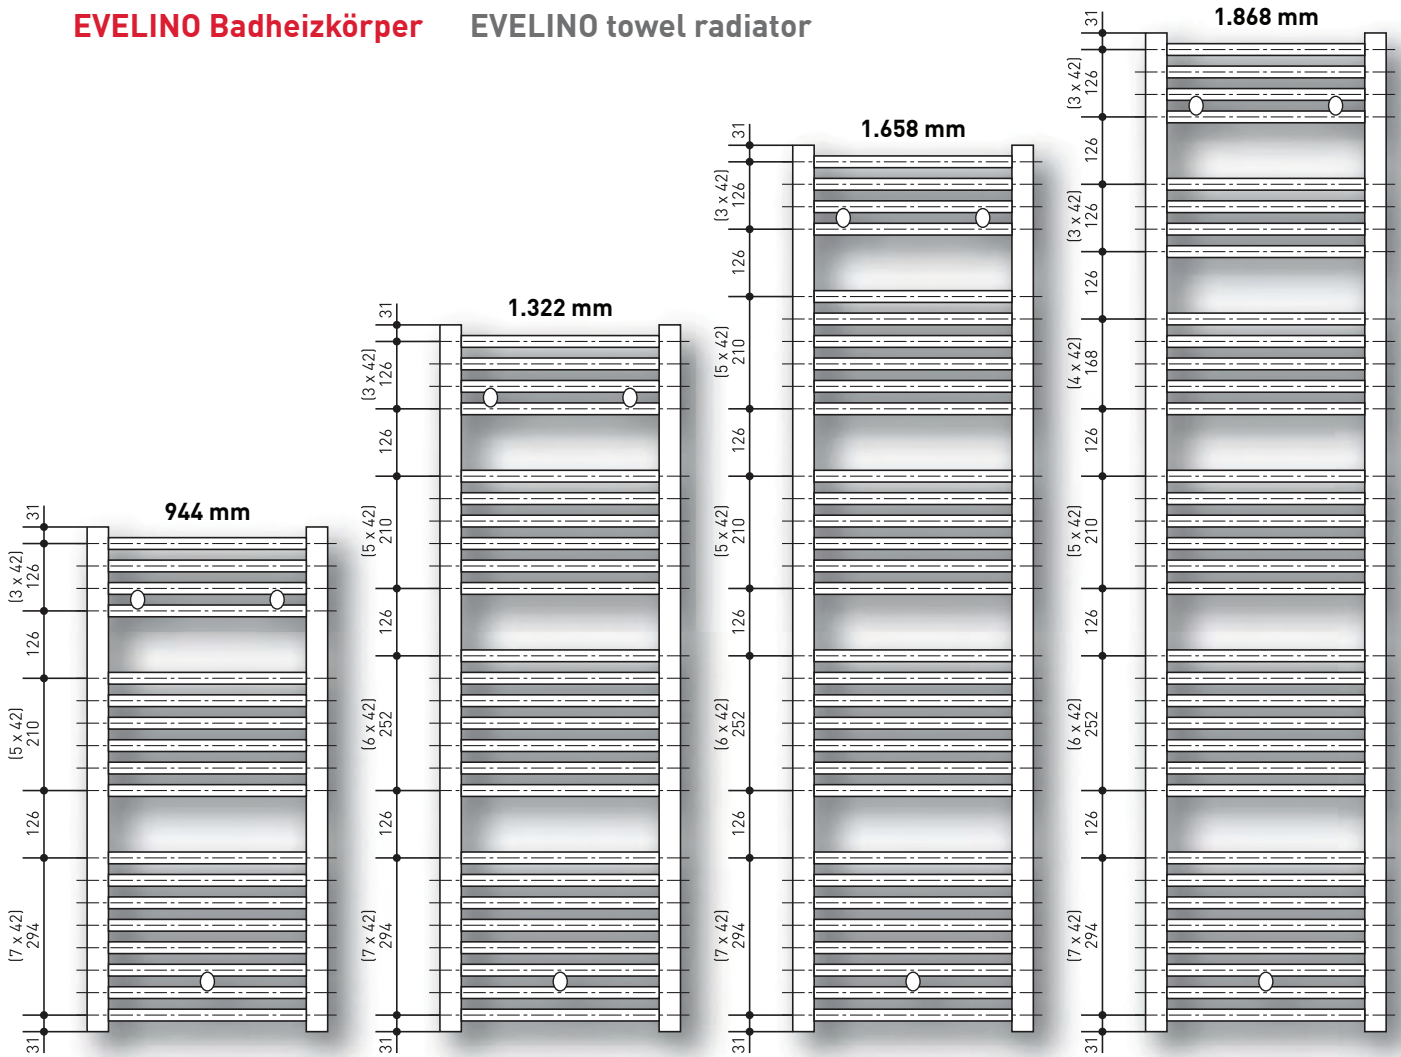


EVELINO Badheizkörper **EVELINO towel radiator**

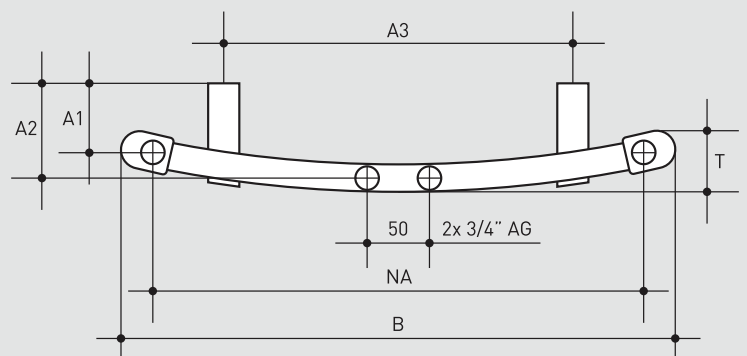

Breite B Width B		Tiefe T Depth T		Abstand A1 Distance A1		Abstand A2 Distance A2	Abstand A3 Distance A3
gerade straight	gebogen curved	gerade straight	gebogen curved	gerade straight	gebogen curved		
mm	mm	mm	mm	mm	mm	mm	mm
450	443	30	45	65-85	59-79	76-96	290
500	495	30	51	65-85	54-74	77-97	295
600	593	30	63	65-85	57-77	91-111	436
750	737	30	87	65-85	52-72	111-131	580

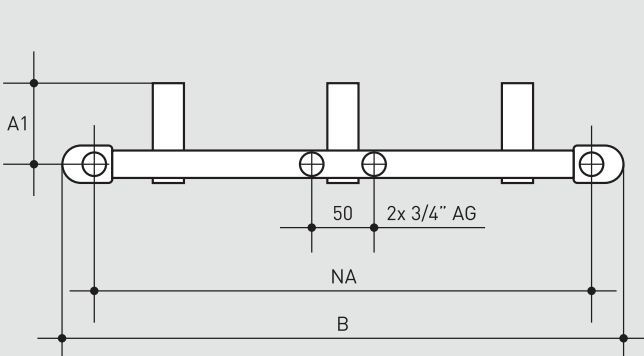

EVELINO Badheizkörper

Technische Daten und Maße

Modelle	gerade Ausführung gebogene Ausführung Renovierungs-Ausführung
Profile	D-Profil 40 x 30 mm Rundrohre ø 22 mm
Rundrohre	Höhe 944 mm: 18 Rohre Höhe 1.322 mm: 25 Rohre Höhe 1.658 mm: 31 Rohre Höhe 1.868 mm: 34 Rohre
Anschlüsse	
Basisanschluss	4 x 1/2" IG
Mittelanschluss	4 x 1/2" IG, MA 2 x 3/4" AG
Seitenanschluss	4 x 1/2" IG, SA 2 x 1/2" IG
Nabenabstand	
Basisanschluss	Baubreite ./ 50 mm (2 x 25 mm)
Mittelanschluss	50 mm
Seitenanschluss	nach Vorgabe
Lieferumfang	Entlüftungs- und Blindstopfen, Dübel, Schrauben, Befestigungen in weiß, farbige Heizkörper in chrom
Verpackung	Kunststoff-Kappen als Kantenschutz, Schutzfolie, transportsicherer Karton
Garantie	5 Jahre
Druck	Betriebsdruck 10 bar Prüfdruck 13 bar
Temperatur	max. 95° C

EVELINO towel radiator

Technical Data and Dimensions

Models	straight type curved type renovation type
Profiles	D-Profile 40 x 30 mm round pipes ø 22 mm
Round pipes	height 944 mm: 18 pipes height 1.322 mm: 25 pipes height 1.658 mm: 31 pipes height 1.868 mm: 34 pipes
Anschlüsse	
Basic connection	4 x 1/2" female thread
Center connection	4 x 1/2" IG, MA 2 x 3/4" male thread
Side connection	4 x 1/2" IG, SA 2 x 1/2" female thread
Hub distance	
Basic connection	overall width./ 50 mm (2 x 25 mm)
Center connection	50 mm
Side connection	according to specification
Scope of delivery	vent plugs and blind plugs, anchor bolts, screws, fastenings in white, coloured radiators in chrome
Packing	plastic caps as edge protection, protective sheet, transport safe carton
Guarantee	5 years
Pressure	operating pressure 10 bar testing pressure 13 bar
Temperature	max. 95° C

Höhe Height	Breite Width	Breite Width	Nabenabstand Hub distance	Exponent Exponent	Gewicht Weight	Volumen Volume	Wärmeleistung Heat output			Heizpatrone E-heater	
	gerade straight	gebogen curved	gerade straight	gebogen curved			75/65 20°C	70/55 20°C	55/45 20°C	empfohlen recommended	
mm	mm	mm	mm	mm	n	kg	l	Watt	Watt	Watt	Watt
944	450	443	400	393	1,199	5,9	3,9	402	331	218	300
944	500	495	450	445	1,205	6,3	4,2	439	361	237	300
944	600	593	550	543	1,217	7,3	4,7	513	421	276	600
944	750	737	700	687	1,236	8,7	5,6	624	510	332	600
1.322	450	443	400	393	1,217	8,1	5,4	552	453	296	600
1.322	500	495	450	445	1,219	8,8	5,8	603	495	324	600
1.322	600	593	550	543	1,222	10,1	6,6	703	576	377	900
1.322	750	737	700	687	1,227	12,0	7,8	854	700	456	900
1.658	450	443	400	393	1,233	10,1	6,8	682	558	363	600
1.658	500	495	450	445	1,231	10,9	7,2	745	610	397	900
1.658	600	593	550	543	1,226	12,5	8,2	871	714	466	900
1.658	750	737	700	687	1,219	14,9	9,7	1.061	870	569	1.200
1.868	450	443	400	393	1,221	11,2	7,5	762	625	408	900
1.868	500	495	450	445	1,221	12,0	8,0	833	683	446	900
1.868	600	593	550	543	1,222	13,8	9,1	976	800	523	900
1.868	750	737	700	687	1,224	16.5	10,7	1.191	976	637	1.200